


Operational class aR, with blade contacts without slots

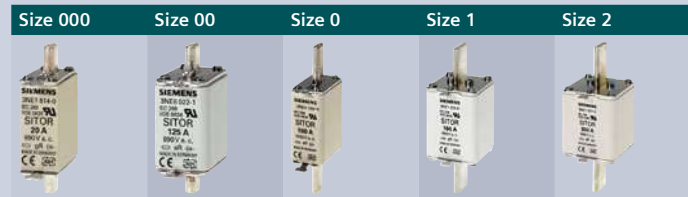

I_n	Switch-off I^2t value	Power loss P_v	Varying load factor WL	U_n AC/DC	Size 000	Size 00	Size 0	Size 1	Size 2
63 A	1500 A ² s	20 W	0.90	1000 V ¹⁾ /–	–	–	3NE4118	–	–
80 A	2200 A ² s	23.3 W	on req.	690 V/440 V	3NE8820-0MK	–	–	–	–
	2400 A ² s	19 W	0.95	690 V ¹⁾ /–	–	3NE8020-1	–	–	–
	3000 A ² s	22 W	0.90	1000 V ¹⁾ /–	–	–	3NE4120	–	–
100 A	3650 A ² s	27 W	on req.	690 V/440 V	3NE8821-0MK	–	–	–	–
	6050 A ² s	25.5 W	on req.	690 V/440 V	–	–	–	3NE8221-0MK	–
	4200 A ² s	22 W	0.95	690 V ¹⁾ /–	–	3NE8021-1	–	–	–
	6000 A ² s	24 W	0.90	1000 V ¹⁾ /–	–	–	3NE4121	–	–
125 A	7800 A ² s	30 W	on req.	690 V/440 V	3NE8822-0MK	–	–	–	–
	8900 A ² s	28.5 W	on req.	690 V/440 V	–	–	–	3NE8222-0MK	–
	6500 A ² s	28 W	0.95	690 V ¹⁾ /–	–	3NE8022-1	–	–	–
	14000 A ² s	30 W	0.90	1000 V ¹⁾ /–	–	–	3NE4122	–	–
160 A	14000 A ² s	34 W	on req.	500 V/440 V	3NE8824-0MK	–	–	–	–
	16200 A ² s	37 W	on req.	690 V/440 V	–	–	–	3NE8224-0MK	–
	13000 A ² s	38 W	0.95	690 V ¹⁾ /–	–	3NE8024-1	–	–	–
	29000 A ² s	35 W	0.90	1000 V ¹⁾ /–	–	–	3NE4124	–	–
200 A	26000 A ² s	49 W	on req.	690 V/440 V	–	–	–	3NE8225-0MK	–
250 A	59000 A ² s	52 W	on req.	690 V/440 V	–	–	–	3NE8227-0MK	–
315 A	120000 A ² s	68 W	on req.	690 V/440 V	–	–	–	3NE8230-0MK	–
350 A	83500 A ² s	68.6 W	on req.	690 V/440 V	–	–	–	–	3NE8331-0MK
400 A	136000 A ² s	72.8 W	on req.	690 V/440 V	–	–	–	–	3NE8332-0MK
450 A	207000 A ² s	80.1 W	on req.	690 V/440 V	–	–	–	–	3NE8333-0MK
500 A	318000 A ² s	77.5 W	on req.	690 V/440 V	–	–	–	–	3NE8334-0MK
550 A	399000 A ² s	86.4 W	on req.	690 V/440 V	–	–	–	–	3NE8335-0MK
630 A	740000 A ² s	90.7 W	on req.	690 V/440 V	–	–	–	–	3NE8336-0MK
Further information									
Installation in 3NH LV HRC fuse bases					■	■	■	■	■
Installation in 3NP and 3KF fuse switching devices					■	■	■	■	■
Further currents, operational class gR					See page 7/56	–	See page 7/56	–	–

¹⁾ For the max. DC voltage, see the Configuration Manual – Fuse systems, chapter Configuration, Use with direct current www.siemens.com/lowvoltage/manuals (45314810)